

(12) **United States Patent**
Goodson et al.

(10) **Patent No.:** **US 10,669,668 B2**
(45) **Date of Patent:** **Jun. 2, 2020**

(54) **CLOTHES DRYER FIRE REDUCTION SYSTEM**

USPC 34/380, 389, 250, 254, 108
See application file for complete search history.

(71) Applicants: **Mark Goodson**, Corinth, TX (US);
David J. Icove, Knoxville, TN (US)

(56) **References Cited**

(72) Inventors: **Mark Goodson**, Corinth, TX (US);
David J. Icove, Knoxville, TN (US)

U.S. PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

3,221,417	A	12/1965	Mellinger
3,471,940	A	10/1969	Smith
3,526,968	A	9/1970	Triplett
3,593,544	A	7/1971	Henderson
3,782,001	A *	1/1974	Cotton D06F 58/28 34/532
4,019,259	A	4/1977	Veraart
4,546,554	A	10/1985	Bullock et al.
5,097,606	A	3/1992	Harmelink et al.
5,101,575	A	4/1992	Bashark
5,166,592	A	11/1992	Bashark
5,228,212	A	7/1993	Turetta et al.
5,281,956	A	1/1994	Bashark
6,047,486	A	4/2000	Reck et al.
6,122,840	A	9/2000	Chbat et al.

(21) Appl. No.: **16/200,121**

(22) Filed: **Nov. 26, 2018**

(65) **Prior Publication Data**

US 2019/0161907 A1 May 30, 2019

Related U.S. Application Data

(60) Provisional application No. 62/591,544, filed on Nov. 28, 2017.

Primary Examiner — John P McCormack

(74) *Attorney, Agent, or Firm* — Gunn, Lee & Cave, PC

(51) **Int. Cl.**

F26B 7/00	(2006.01)
D06F 58/30	(2020.01)
D06F 58/38	(2020.01)
D06F 58/50	(2020.01)
D06F 103/00	(2020.01)
D06F 103/10	(2020.01)
D06F 103/36	(2020.01)
D06F 105/24	(2020.01)

(57) **ABSTRACT**

A clothes dryer apparatus and system that reduces the buildup of electric charges within a dryer drum by introducing ions. The system monitors the voltage within the drum by taking measurements on voltage sensor assembly. The sensor assembly obtains a voltage when two areas of a fabric, or two separate items of the clothing, contact the sensor. If a threshold voltage is obtained, an ion generator introduces cations and anions into the drum of the dryer to neutralize the static charge of the clothing. The reduction of static electricity increases efficiency as the clothing items do not stick together which permits better heat flow and increases safety by reducing the amount of electrical charge within the drum.



(52) **U.S. Cl.**

CPC **D06F 58/30** (2020.02); **D06F 58/38** (2020.02); **D06F 58/50** (2020.02); **D06F 2103/00** (2020.02); **D06F 2103/10** (2020.02); **D06F 2103/36** (2020.02); **D06F 2105/24** (2020.02)

(58) **Field of Classification Search**

CPC D06F 2058/2838; D06F 2058/2858; D06F 2058/2854; D06F 58/28

9 Claims, 5 Drawing Sheets

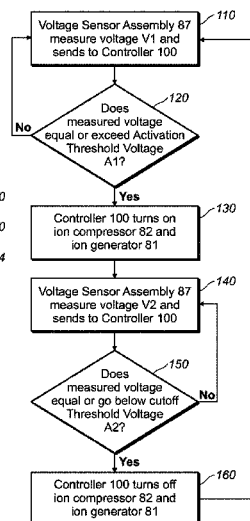

(56)

References Cited

U.S. PATENT DOCUMENTS

6,141,887	A	11/2000	Chen et al.	
6,449,876	B1	9/2002	Parsell	
7,020,985	B2	4/2006	Casey et al.	
7,345,491	B2	3/2008	Peziel	
7,345,497	B2	3/2008	Matsuno	
7,475,495	B2	1/2009	Chiles et al.	
7,997,005	B2*	8/2011	Monk	H01Q 1/002 34/380
2004/0006886	A1	1/2004	Lee et al.	
2004/0216326	A1*	11/2004	Kitamura	D06F 25/00 34/597
2005/0076534	A1*	4/2005	Ofosu-Asante	D06F 35/00 34/597
2006/0272177	A1	12/2006	Pezier et al.	
2007/0006484	A1	1/2007	Moschuetz et al.	
2007/0271966	A1*	11/2007	O'Brien	C11D 17/047 68/2
2009/0064422	A1	3/2009	Kim et al.	
2009/0217547	A1*	9/2009	Kim	D06F 25/00 34/275
2011/0197466	A1*	8/2011	Shami	A45D 20/12 34/283
2012/0000276	A1	1/2012	Cinar et al.	
2012/0006996	A1*	1/2012	Nishino	H01T 23/00 250/395
2013/0192081	A1*	8/2013	Zambrowicz	D06F 58/04 34/282
2016/0374447	A1*	12/2016	Sterling	A45D 20/08 34/275

* cited by examiner

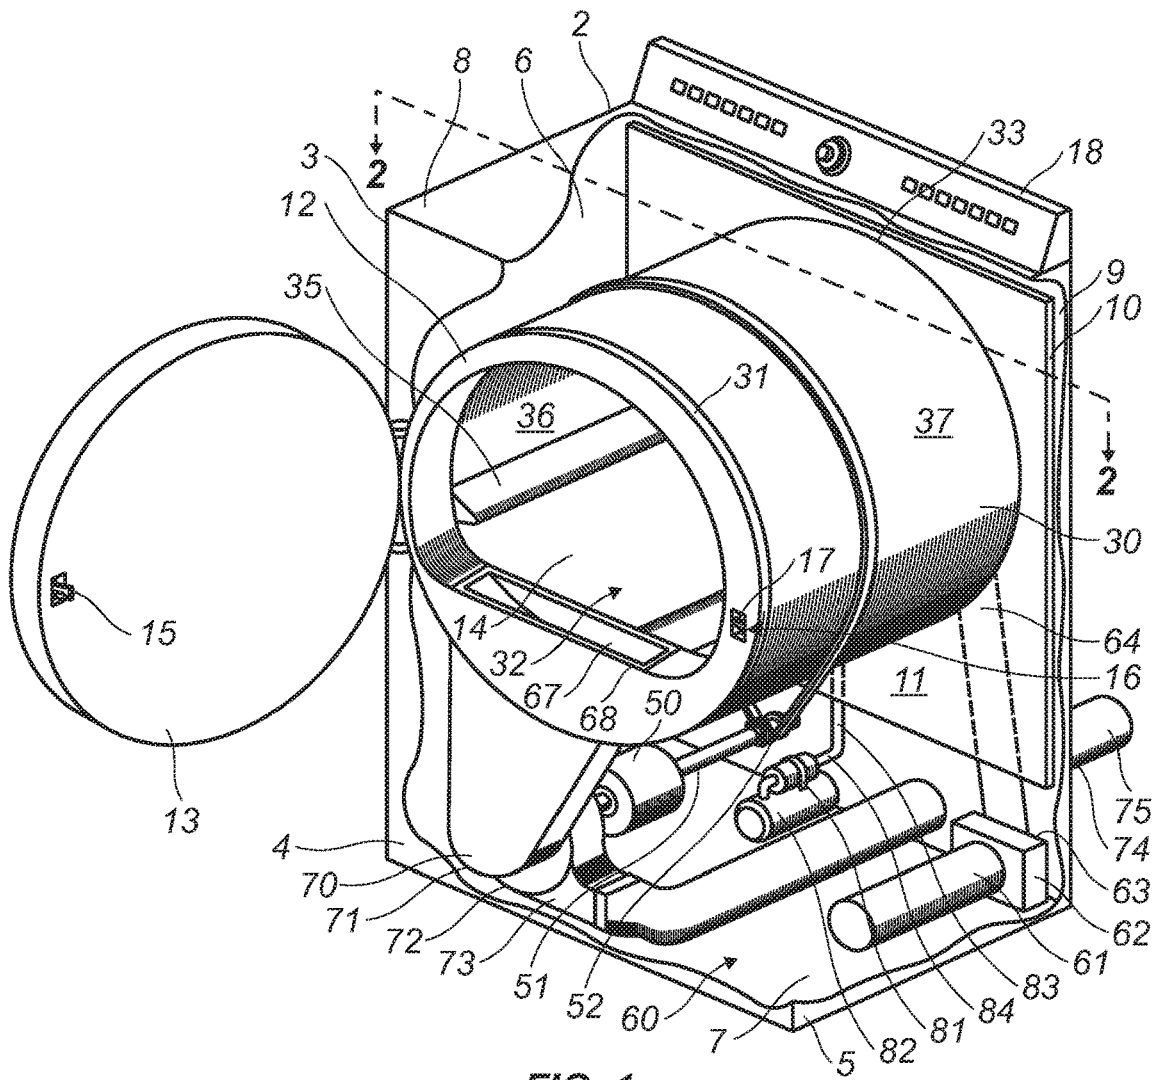


FIG. 1

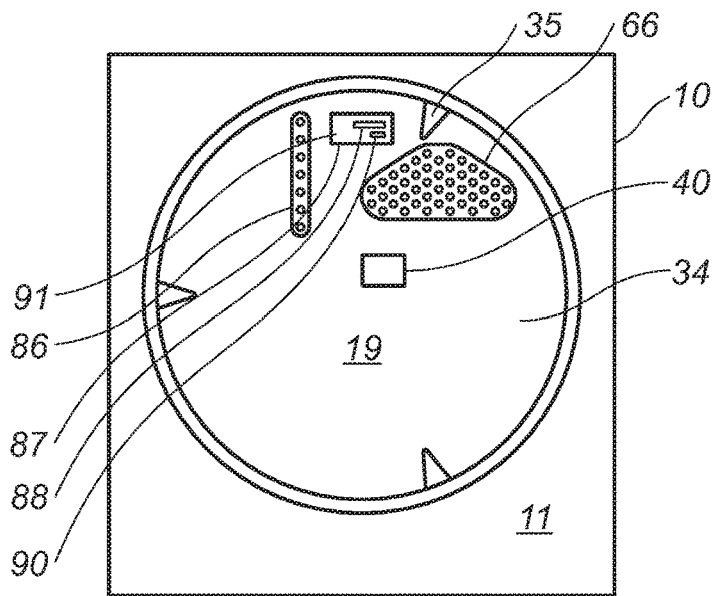


FIG. 2

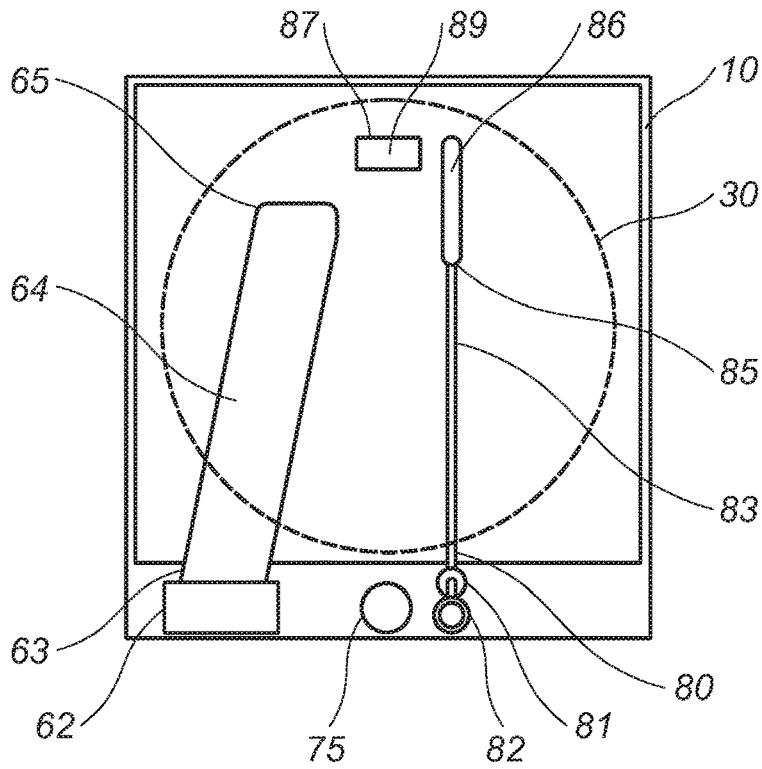


FIG. 3

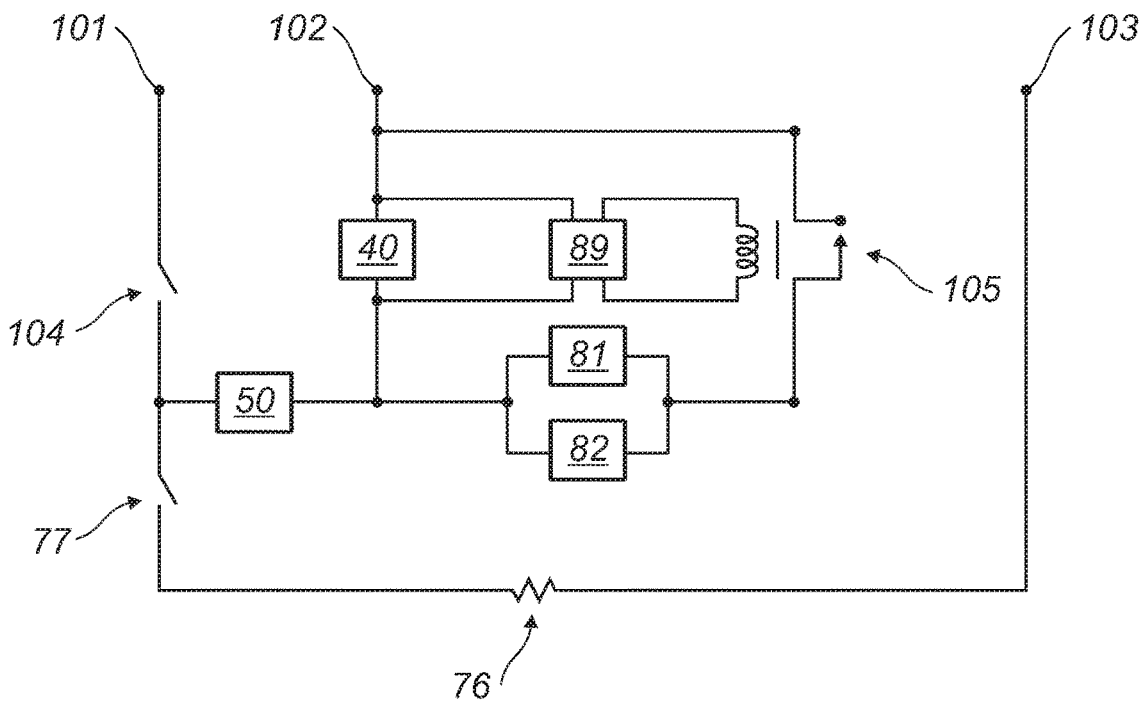


FIG. 4

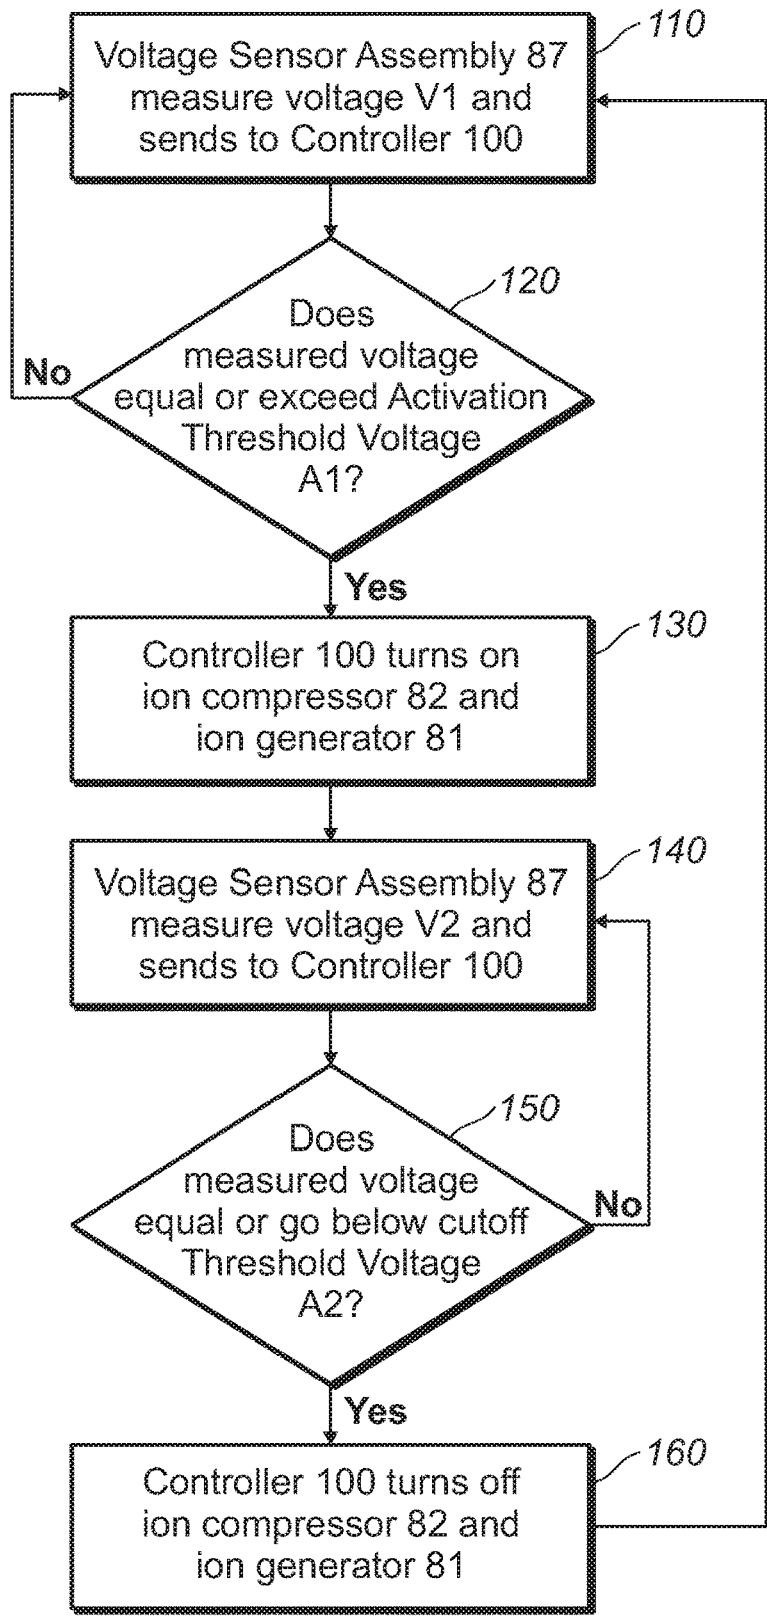


FIG. 5

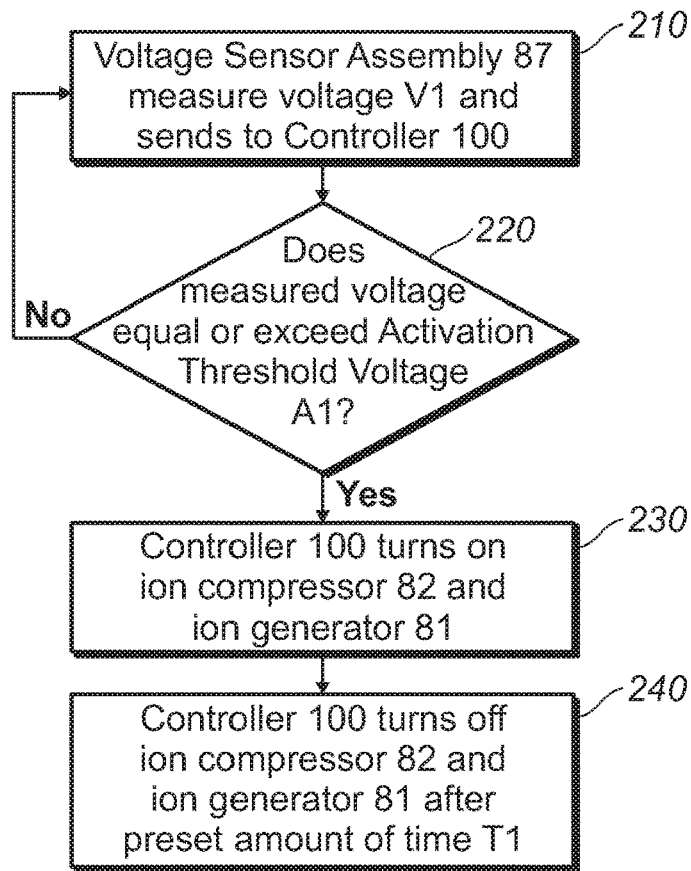


FIG. 6

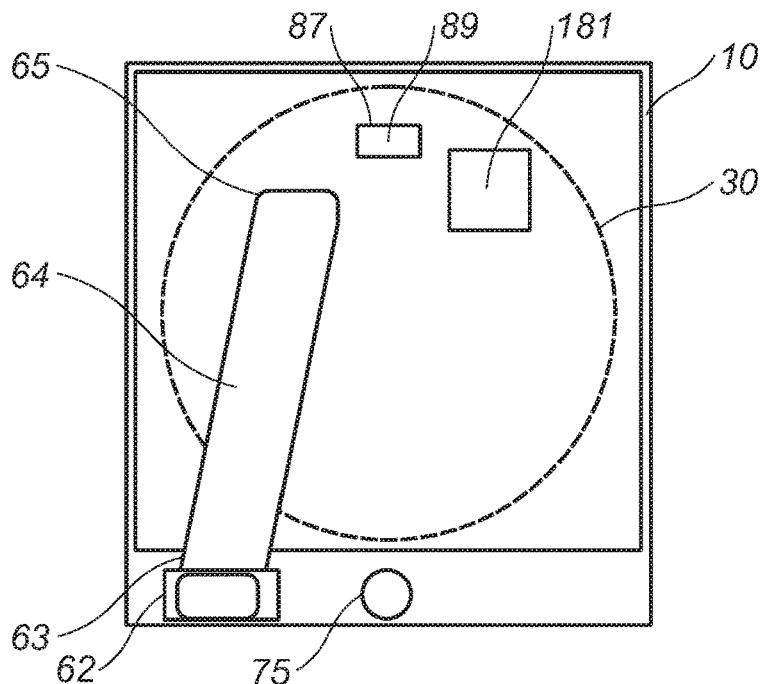


FIG. 7

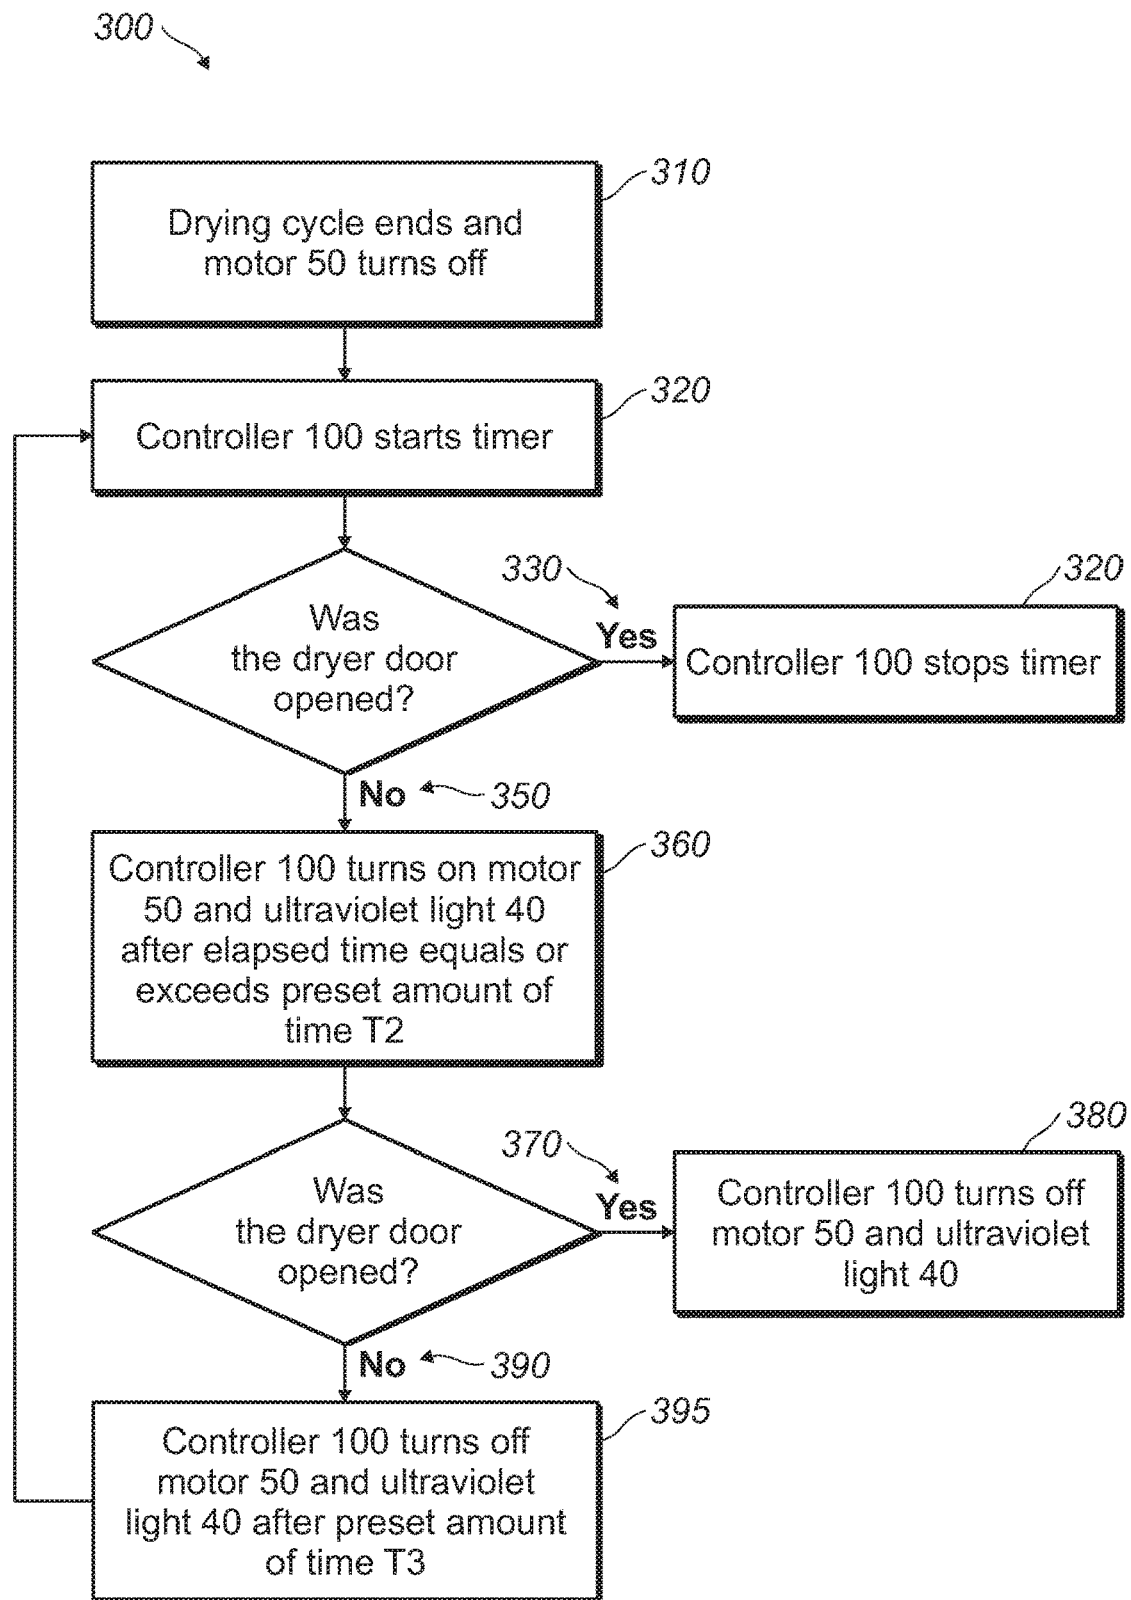


FIG. 8

1

CLOTHES DRYER FIRE REDUCTION SYSTEM**CROSS-REFERENCES TO RELATED APPLICATIONS**

This application claims the benefit of U.S. Provisional Application Ser. No. 62/591,544 filed Nov. 28, 2017 entitled Improved Clothes Dryer. The contents of said application are incorporated by reference herein.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

Not applicable.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to clothes dryers, and more specifically, a system to prevent fire by reducing the buildup of static electricity during the drying cycle and by reducing the potential for spontaneous combustion.

2. Description of the Related Art

A clothes dryer generally comprises a cabinet, a drum, motor, mechanism for spinning the drum, a heating element, and electronic controls. The user inserts damp clothes into the dryer drum. The clothes dryer is then powered on, and the drum rotates causing the clothes to tumble while a stream of heated air is blown into the drum and contacts the clothes. The heated air removes water from the clothes over time.

The tumbling of the clothes creates friction between pieces of drying fabric by causing different pieces of clothing and different layers of the same piece of clothing to rub against each other. The coulomb friction caused by the clothes rubbing together causes electrical charges to be built up and stored within the fabric of the clothes. Some fabrics receive electrons causing them to have a negative charge whereas other fabrics donate electrons causing them to have a positive charge.

The buildup of static electric charges in the drying fabric causes the clothes to clump together based on the attraction between a positively charged clothing item to a negatively charged clothing item. The clumping together impedes circulation of the heated air throughout the drum making it more difficult and time consuming for the heated air to effectively dry the clothes. As a result, the user must increase the temperature of the heated air or increase the length of the drying cycle in order to dry the clothes. These options increase the risk of fire and are not energy efficient.

In addition, it is not uncommon for clothes to be left overnight (or even longer) undisturbed in a clothes dryer after the drying cycle is completed. Even after the dryer shuts off, the undisturbed mass of hot clothes, or portions thereof, may continue to self-heat depending on the presence of certain fats/oils that were not removed during the washing process. This heat can continue to build up on the clothes which can promote spontaneous combustion and a resultant fire.

One product design intended to reduce clothes clumping during the drying cycle was the introduction of metal fins in the drum. See U.S. Pat. No. 4,190,874. However, the metal fins create inefficiencies by absorbing the heat that should be delivered to the damp clothes. U.S. Pat. No. 5,416,983

2

teaches the use of conductive material in order to reduce static electricity build-up in the drum but this is inefficient as it relies on necessary contact with the clothes in order to dissipate the static electricity. During a cycle in the dryer, the clothes do not all touch the drum continuously resulting in inefficient static reduction. Another solution is to use anti-clump fabric sheets that are separately purchased by the consumer and put into the drum with the clothes. However, this solution generates extra expense for the user and requires the user to remember to purchase and insert the sheets.

The aforementioned solutions are imperfect and there remains a need to develop a clothes dryer with the ability to efficiently eliminate static electricity build up during the drying cycle.

BRIEF SUMMARY OF THE INVENTION

The present invention is a dryer with the capability to monitor electrical charge within the drum and turn off the flow of heated air when the electrical charge reaches a designated threshold. Once the threshold is reached, ion rich air is introduced into the drum through an ion generator. The ion rich air interacts with and neutralizes the built-up static electric charge within the drum and the clothes. The ion rich air stream penetrates the fabric layers allowing contact with the interior fabric layers. This increases the amount of contact between the ion rich air and static electricity resulting in increased neutralization of the static electricity and more effective de-clumping of the clothes which increases surface area of the clothing to allow for more efficient moisture removal.

The present invention further reduces the potential for an internal fire by decreasing the conditions necessary for spontaneous combustion. A controller measures the time between the completion of the drying cycle and when the dryer door is opened as detected by the door sensor. If a sufficient time has passed without the door opening, the controller turns on the drum to permit it to rotate for a designated period of time without introduction of heat. The tumbling of clothes permits exposure to the air within the drum allowing any entrapped heat to dissipate. At the same time, a light radiation source (UV light or LED) is turned on during the additional tumbling cycle. Any moisture remaining within the clothes creates an environment for microbes to grow which generates heat. The visible and invisible optical radiation generated by the light helps destroy microbes. Thus, the tumbling after drying aerates the clothes, dissipates entrapped heat, and destroys microbes reducing the potential for spontaneous combustion.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

FIG. 1 is a partially broken perspective view of a clothes dryer with an embodiment of the clothes dryer static electricity reduction system.

FIG. 2 is a front view of a vertical cross section of the drum with interior panel through line 2-2 in FIG. 1.

FIG. 3 is a rear view of a clothes dryer with an embodiment of the clothes dryer static electricity reduction system.

FIG. 4 is a partial circuit diagram of an embodiment of the clothes dryer static electricity reduction system.

FIG. 5 is a flow chart showing the operation of an embodiment of the clothes dryer static electricity reduction system.

FIG. 6 is a flow chart showing the operation of an alternative embodiment of the clothes dryer static electricity reduction system.

FIG. 7 is a rear view of a clothes dryer with a second embodiment of the clothes dryer static electricity reduction system.

FIG. 8 is a flow chart showing the operation of an embodiment of the heat dissipation cycle of the clothes dryer static electricity reduction system.

DETAILED DESCRIPTION OF THE INVENTION

As seen in FIG. 1, an embodiment of the clothes dryer static electricity reduction system 1 is positioned within a generally standard dryer 2 having a cabinet 3, drum 20, motor 50, heater/blower system 60, and ion generator system 80. The cabinet 3 of the disclosed embodiment comprises a front panel 4, first side panel 5, second side panel 6, bottom panel 7, top panel 8 and rear panel 9 arranged in a generally cuboid box-like shape. An interior panel 10 is positioned within the cabinet 3. The front panel 4 further comprises a drum receptacle 12, door 13, and an opening 14. The door 13, when closed, covers the opening 14. A drum latch 15 is positioned on the interior of the door 13. A latch receptacle 16 is positioned on the drum receptacle 12 and capable of receiving the door latch 13 in such a manner that the door 13 is shut against the door receptacle 12. A door sensor 17 is in communication with the latch receptacle 16 and can determine if the door is open or closed. As seen in FIG. 1, the drum receptacle 12 is shown separate from the front panel 4 but is generally integral with the first panel 4. Alternatively, the interior panel 10 and the rear panel 9 may be the same.

The drum 30 is positioned inside the cabinet 3 between the front panel 4 and the interior panel 10. The drum 30 is cylindrically shaped with a front circular edge 31 defining an open front end 32 and a rear circular edge 33 defining an open rear end 34. The drum 30 rests on a wheel assembly (not shown) which is well known in the art. The front circular edge 31 seals against the drum receptacle 12 such that the drum 30 may rotate while the drum receptacle 12 remains stationary. A portion of the open front end 32 corresponds with opening 14. The door 13, when closed, covers the open front end 32. The rear circular edge 33 of the drum 30 seals against the front surface 11 of the interior panel 10 such that the drum 30 may rotate while the interior panel 10 remains stationary. Connections of the drum to the interior panel 10 and the drum receptacle 12 are well known in the art. A portion 19 of the front surface 11 of the interior panel 10 is exposed to the interior of the drum 30 through the open rear end 34.

In the disclosed embodiment, a motor 50 having a drive shaft 51 is mounted to the bottom panel 7 of the cabinet 3. A drive belt 52 wraps around the outer surface 37 of the drum 30 and is rotatably attached to the drive shaft 51. In operation, the motor 50 spins the drive shaft 51 ultimately causing the drive belt 52 (and drum 30) to spin. Such operation is well known in the art and may include idler pulleys and other mechanisms that control revolution of the drum 30.

The drum 30 has baffles 35 protruding from the interior surface 36 of the drum 30. In an embodiment of the clothes dryer static electricity reduction system, the baffles 35 are constructed from a plastic material impregnated with carbon fiber or aluminum shards. A typical dryer has three baffles 35 that run longitudinally (extending from the front circular

edge 31 to the rear circular edge 33) and are generally spaced one hundred and twenty degrees relative to another.

An ultraviolet light 40 is mounted to the interior panel 10 such that it emanates light into the interior of the drum 30. The ultraviolet light 40 may be an LED light, non-visible laser, or other ultraviolet source. The ultraviolet light 40 may be of sufficient strength to kill, sterilize, and/or limit growth of mold and mildew within the drum 30 and/or clothes within the drum 30.

The heater and blower system of a typical dryer are well known in the art. The air supply intake 61 is fluidly connected to the heater housing 62. A heating element 76 is positioned within heater housing 62 and is controlled by a thermostat 77. The first end 63 of the drum inlet conduit 64 is fluidly connected to the heater housing 62 and the second end 65 of the drum inlet conduit 64 is fluidly connected to the drum inlet 66 of the interior panel 10. The drum inlet 66 is in fluid communication with the interior of the drum 30. A drum outlet 67 is in fluid communication with the interior of the drum 30 and positioned within the drum receptacle 12. A lint catcher 68 may be placed within the drum outlet 67. The first end 69 of the drum outlet conduit 70 is fluidly connected to the drum outlet 67 and the second end 71 of the drum outlet conduit 70 is fluidly connected to the blower housing 72. A blower wheel is positioned within the blower housing 72 and connected to the drive shaft 51. The first end 73 of the exhaust conduit 74 is fluidly connected to the blower housing 72. The exhaust conduit 74 extends through the rear panel 9 of the cabinet 3 and terminates in an outlet 75. The outlet 75 may be fluidly connected to an additional conduit that routes exhaust outside a room. One skilled in the art understands that the location and design of the heat and exhaust system components varies between different styles and brands of dryers.

As seen in FIGS. 1-3, the ion generator system 80 comprises an ion generator 81 fluidly connected to an air compressor 82. The ion generator system 80 further comprises a non-metallic conduit 83 with the first end 84 in fluid communication with the ion generator 81 and the second end 85 of the non-metallic conduit 83 is fluidly connected to the ion inlet 86 of the interior panel 10. The ion inlet 86 is in fluid communication with the interior of the drum 30. The ion generator system 80 further comprises a voltage sensor assembly 87 further comprising a sensor 88 and a voltmeter 89. In the disclosed embodiment, the sensor is mounted on the interior face 11 of the interior panel 10 such that it can measure voltage from within the drum 30. In the disclosed embodiment the sensor 88 comprises two metal contact strips 90 imposed on a polymer block 91. The voltmeter detects the voltage differential between the two metal contact strips 90. In the disclosed embodiment the ion generator is a balanced ion generator generating cations and anions. The voltage sensor assembly 87 may be integral with ion generator 81 or a separate component. One skilled in the art understands the location and design of the sensor 88 may be varied depending on the components of the dryer and the sensor may be positioned in numerous locations so long as a voltage may be measured on clothing between two contact strips, regardless of where the contact strips are within the dryer. For example, the sensor may be the same type of voltage sensor utilized in existing dryers to determine moisture content of the clothes.

A controller 100 (identified in FIG. 5), or other logic board including processors, is in electronic communication with a control panel 18 on the cabinet 3, the door latch sensor 17, the heater/blower system 60, and the ion generator system 80. As found in industry standard dryers, the

5

controller **100** may also be in electronic communication with various additional sensors and able to control the heater/blower system **60** based on inputs from the control panel **18**, sensors of operation, and safety sensors related to performance of the heater/blower system **60**. A power supply powers the light **40**, motor **50**, heater/blower system **60**, the ion generator system **80**, and the controller **100**. Various additional relays, as known in the art, may be utilized such as a relay or switch between the controller **100** and the light **40**, motor **50**, heating element **76**, thermostat **77**, ion generator **81**, and/or air compressor **82**. Electronically, the ion system **80** may have other controls such as the light **40**, ion generator **81**, and/or air compressor **82** may not be able to turn on unless the motor **50** is operating.

FIG. 4 is a partial circuit diagram of the dryer **2**. The supply conductors **101**, **102**, and **103** provide the power input for the dryer **2** with supply conductors **101** and **103** as **120** volt legs and supply conductor **102** as the neutral leg. Switch **104** is an on/off switch that controls power to the clothes dryer static electricity reduction system **1** and dryer **2**. The supply conductors **101** and **103** provide two hundred and forty volts to the heating element **76** and thermostat **77** and one hundred and twenty volts to the motor **50**, ion generator **81**, air compressor **82**, ultraviolet light **40**, and voltmeter **89**. A relay **105** is in electrical communication with the voltmeter **89** and when a certain threshold voltage is exceeded, the relay **105** is activated to complete the circuit for power to flow to the ion generator **81** and air compressor **82**.

It should be readily appreciated the circuitry may be configured in a multitude of ways to require certain precursors such that the motor **50** must be on before the ion generator **81**, air compressor **82**, ultraviolet light **40**, and/or voltmeter **89** may operate. Conversely, the circuitry may be configured such that the air compressor **82** is always operating when the drum **30** to provide a continued flow of air to cool the ion generator **81** even when the ion generator **81** is not generating ions.

The operation of the clothes dryer static electricity reduction system is described in reference to FIGS. 1-5. The user opens the drum door **14** and inserts damp clothes and/or other materials into the drum **30** and closes the door **14**. Using the control panel **18**, the user selects the desired heating and dryer cycle. The standard heater/blower system **60** operates by powering the motor which rotates the drive shaft **51**. The rotation of the drive shaft **51** causes the drive belt **52** to rotate which in turn causes the drum **30** to spin. Furthermore, the rotation of the drive shaft **51** also causes the blower wheel within the blower housing **72** to turn. The rotation of the blower wheel draws air from the drum **30** through the lint catcher **68** and drum outlet conduit **70**. In turn, this causes air to be drawn into the drum through the drum inlet conduit **64** from the heater element housing **62** and the air inlet **61**. Once the air passes through the blower housing **72**, the blower wheel pushes the air through the exhaust conduit **74** and through the exhaust outlet **75**.

The controller **100** operates the thermostat **77** which controls the heating element **76**. If the heating element **76** is on, the air passing over the heating element **77** is heated prior to entering the drum inlet conduit **64** and ultimately the drum **30**. The heated air passes over and through the damp clothes causing the moisture in the clothes to evaporate in the heated air. Clothes that are not clumped together dry faster as the clothes have more surface area for the heated air to contact. The moisture content of the air passing through the exhaust conduit **74** may be measured for dryer performance and may alter the cycle time based on predetermined

6

settings from the control panel **18** and/or logic within the controller **100**. Alternatively, the heating element may be off and then unheated air is drawn into the drum **30**.

As the drum **30** spins, friction is created as the clothes rub against each other, and/or as layers of one piece of clothing rub against other layers. This friction creates a buildup of static electrical charge which is stored in the fabric of the clothes. Some portions of the clothes gain electrons and other lose electrons resulting in the clothes, or layers of a clothing article, to cling together due to the positive and negative charges attracting to each other. In the disclosed embodiment, the baffles **35** are impregnated with conductive material in order to cancel some of the static electrical charge. More specifically, the conductive polymer composition of the baffles **35** serves as a "short" circuiting member so as to cause charge cancellation on the portions of the drying clothing that make contact with the electrically conductive baffles **35**. However, baffles **35** cannot generally absorb electric charge at the rate it is being generated as the static electric charge in the clothes increases over time.

As seen in FIG. 5, during operation and while the drum **30** is rotating, the ion system **80** continuously measures the electrical charge within the drum **30**. As the drum spins, the clothes tumble and periodically contact the two metal contact strips **90** of the sensor **88**. Upon contact, the voltmeter measures **110** the voltage and electronically sends the voltage measurement **V1** to the controller **100**. The controller **100** compares **120** the absolute value of the measured voltage **V1** to a predetermined activation threshold voltage **A1**. The predetermined activation threshold voltage **A1** may be set to at 200 volts. If the absolute value of the measure voltage **V1** is less than the predetermined activation threshold voltage **A1** then measurements **110** are repeated. If the measured voltage **V1** is equal to or exceeds the predetermined activation threshold voltage **A1** then the controller **100** activates the ion generator **81** and air compressor **82** via electronic signal **130**. As seen in FIGS. 1-4, when the ion generator **81** and air compressor **82** are turned on, the air compressor **82** forces air through the conduit **83**. The ion generator **81** creates ions and introduces those ions into the air stream of the conduit **83**. The air compressor may modulate the air flow to create varied levels of ion penetration into the clothes. The ion rich air is forced through the ion inlet **86** where it enters the drum **30**. The ions in the ion rich air interact with the cations and anions of the electrically charged clothing to neutralize the charge.

Referring back to FIG. 5, the voltmeter **89** to measures voltage obtained from the sensor **88** during the operation of the ion generator **81** and air compressor **82** and sends the measured voltage **V2** to the controller **100**. The controller **100** compares **150** the absolute value of the measured voltage **V2** to a predetermined cutoff threshold voltage **A2**. The predetermined cutoff threshold voltage **A2** may be the same as the predetermined activation threshold voltage **A1** or lower. If the absolute value of the measured voltage **V2** is greater than the predetermined cutoff threshold voltage **A2** then the measurements **140** are repeated. If the measured voltage **V2** is equal to or less the predetermined cutoff threshold voltage **A2** then the controller **100** shuts off the ion generator **81** and air compressor **82** via electronic signal **160**. The voltmeter then measures **110** the voltage and electronically sends the voltage measurement **V1** to the controller **100** and the cycle is repeated.

In a modification to the above, the controller **100** may not turn off the ion generator **81** and air compressor **82** until the predetermined threshold cutoff voltage **A2** is reached and the

ion generator **81** and air compressor **82** have run for a predetermined amount of time.

The activation and run cycle of the ion generator **81** and air compressor **82** may be modified by settings on the control panel **18** and/or preprogrammed in the controller **100**. In an alternative embodiment as disclosed in FIG. 6, the voltmeter measures **210** the voltage and electronically sends the voltage measurement **V1** to the controller **100**. The controller **100** compares **220** the absolute value of the measured voltage **V1** to a predetermined activation threshold voltage **A1**. If the absolute value of the measure voltage **V1** is less than the predetermined activation threshold voltage **A1** then measurements **210** are repeated. If the measured voltage **V1** is equal to or exceeds the predetermined activation threshold voltage **A1** then the controller **100** activates the ion generator **81** and air compressor **82** after a preset amount of time **T1**. After the ion cycle is terminated in this situation, the voltmeter measures **210** the voltage and the cycle is repeated.

In alternative embodiments, the heating element may be turned off while the ion generator **81** and ion compressor **82** are in operation.

As seen in FIG. 7, an alternative embodiment of the present invention does not utilize an air compressor in conjunction with the ion generator. Instead, the ion generator **181** is positioned on the interior panel **10** in direct communication with the ion inlet **86**. In this embodiment, the voltage sensor assembly **87** may be integral with ion generator **181** or a separate component. In this embodiment, the controller **100** is programmed to turn on the ion generator **181** via electronic signal when the voltage, as determined by the voltmeter **89**, reaches a predetermined activation threshold voltage **A1** as disclosed in FIGS. 4 and 5. When the ion generator **181** is turned on, the ions are in direct contact with the ion inlet **86** where the ions are dispersed into the drum **30** by diffusion. The ions in the ion rich air interact with the cations and anions of the electrically charged clothing to neutralize the charge. During the operation of the ion generator **81** and air compressor **82**, the voltmeter **89** continues to measure voltage obtained from the sensor **88**. Once the voltage drops below the predetermined cutoff threshold voltage **A2**, the controller **100** sends an electronic signal to turn off the ion generator **181**. The predetermined cutoff threshold voltage **A2** may be the same as the predetermined activation threshold voltage **A1** or lower. Furthermore, the controller **100** may not turn off the ion generator **110** until the predetermined threshold cutoff voltage **A2** exists for a certain period of time such that the voltage measurements must remain below the predetermined cutoff threshold voltage **A2** for a predetermined period of time. Ion generator **110** may be controlled by the controller **100** in the same manner as described for the embodiment encompassing an air compressor **82**.

An exemplar source of ions is the ion generator made by Keyence, including the SJ series. Some ion generators have internal static sensing circuits, which would negate the need for voltage measuring circuit which would permit the voltage sensor assembly **87** to be integral with the ion generator **81**, **110**. In accordance with standard dryer fire safety, the last ten minutes or so of clothes drying makes use of tumbling only to help dissipate trapped/entrained heat flux within the fabric layers. This "cooling off" cycle remains subject to static electrical build up. By injecting the neutralizing ions during the cooling off period, the layers of fabric can better cool off in that they do not stick together as much.

While use of a controller or processor to control the operation of the ion generator **81**, **100** is preferred, other circuit mechanisms may be employed such as causing an SPDT relay to energize, based on a preset voltage reading, that transfers power from the heating element to the ion generator based on the movement of the coil.

As seen in FIG. 8 the heat dissipation cycle **300** selectively operates the motor **50** and ultraviolet light **40** depending on certain events. Once the drying cycle ends **310**, meaning the drum **30** is no longer rotating, the controller **100** starts a timer **320**. If the controller **100** receives a signal that the door **14** was opened **330**, as detected by the door latch sensor **17**, then the controller **100** stops the timer **340**. If the door is opened, it is presumed the clothes were removed and/or ambient air was introduced into the drum **30** through door opening **13**. If the controller **100** receives a signal that the door **14** was not opened **350**, as through the failure to detect the opening of the door **14** by the door latch sensor **17**, then the controller **100** turns on the motor **50** which permits the drum **30** to rotate and the ultraviolet light **40** after the elapsed time as determined by the timer equals or exceeds a preset amount of time **T2** **360**. In the preferred embodiment, the preset amount of time **T2** may be 30 minutes but any elapsed time period may be useful to assist in dissipating entrapped heat and microbe growth. If the controller **100** receives a signal that the door **14** is opened while the motor **50** and the ultraviolet light **40** are operating **370**, then the controller **100** turns off the motor **50** and the ultraviolet light **40** **380**. If the door is not opened while the motor **50** and ultraviolet light **40** are operating **390**, the controller **100** turns off the motor **50** and ultraviolet light **40** after a preset amount of time **T3** **395**. In the preferred embodiment, the preset amount of time **T3** may be 10 seconds but may be longer depending on dampness of clothes, amount of heat dissipation cycles **300** executed, or user preferences. The controller **100** then restarts the timer **320** and the heat dissipation cycle **300** is repeated.

It should be readily appreciated the heat dissipation cycle **300** may operate in a multitude of matters including linking the heat dissipation cycle **300** with a wrinkle resistant cycle, limiting the number of heat dissipation cycles **300**, utilizing only the motor **50** and not utilizing the ultraviolet light **40**, utilizing only the ultraviolet light **40** and not the motor **50**, or utilizing the ultraviolet light **40** separate from motor **50**. Furthermore, the preset amount of time **T2** and preset amount of time **T3** may be variable and/or dependent upon the number of heat dissipation cycles **300** executed. For example, the preset amount of time **T2** may be shorter for the first heat dissipation cycle **300** and increase in length as more heat dissipation cycles **300** are executed. Moreover, the preset amount of time **T3** may be longer the first heat dissipation cycle **300** and decrease in length as more heat dissipation cycles **300** are executed.

The embodiment has been described with reference to a standard dryer cabinet. Those skilled in the art understand that the static electricity reduction system disclosed can be modified to be used in any dryer. The components can be arranged differently and mounted in different places within the interior of the dryer. Additionally, the source of heat could be a fueled gas burner, as opposed to a resistance heater. The conductive polymer fins can also be made from a conductive metal. It is also anticipated that some clothes/fibers may dry better if both heated air and injection of ions by way of compressed air are carried out simultaneously.

The invention claimed is:

1. A static electricity reduction system for a clothes dryer comprising:

9

a drum for receiving clothing;
 a voltage sensor positioned to measure the voltage of at least a portion of the clothing within the drum;
 an ion source in fluid communication with the interior of the drum; and
 a controller in electrical communication with the voltage sensor and the ion source wherein the controller activates the ion source upon the voltage sensor measuring a predetermined activation threshold voltage and deactivates the ion source upon the voltage sensor measuring a predetermined cutoff threshold voltage; and
 a heat source in fluid communication with the interior of the drum wherein the controller is programmed to cycle between periods in which the heat source is on and the ion source is off and periods in which the heat source is off and the ion source is on.

2. The static electricity reduction system for a clothes dryer of claim 1 wherein the controller deactivates the ion source upon the passage of a predetermined amount of time.
3. The static electricity reduction system for a clothes dryer of claim 1 wherein the ion source further comprises an ion generator fluidly connected to an air compressor.

10

4. The static electricity reduction system for a clothes dryer of claim 3 wherein the air compressor is a modulating air compressor.
5. The static electricity reduction system for a clothes dryer of claim 1 wherein a non-metallic conduit connects the ion source to the drum.
6. The static electricity reduction system for a clothes dryer of claim 3 wherein a non-metallic conduit connects the ion source to the drum.
7. The static electricity reduction system for a clothes dryer of claim 1 further comprising an ultraviolet light source in visual communication with the interior of the drum.
8. The static electricity reduction system for a clothes dryer of claim 1 further comprising at least one baffle within the drum wherein the baffle contains a conductive material.
9. The static electricity reduction system for a clothes dryer of claim 8 wherein the baffle is a plastic material containing carbon fiber or aluminum shards.

* * * * *